

DRAWN BY: LSTJOHN	
DATE: 1 APR 2026	
DESCRIPTION: TYPICAL VERTICAL CHANNEL SUPPORT INSTALLATION	
DWG #: STC-DET-0021-A.DWG	

DIMENSIONS AND TOLERANCES ARE FOR MANUFACTURING PURPOSES ONLY. SUPPLIED COMPONENTS AND POST PRODUCTION TOLERANCES MAY VARY FROM THE MANUFACTURING AND PRODUCTION TOLERANCES DEFINED WITHIN THIS DOCUMENT.

TOLERANCES - ALL DIMENSIONS ARE IN INCHES
DIMENSIONS ARE IN ACCORDANCE WITH ASME Y14.5-2009
MANUFACTURING TOLERANCES UNLESS OTHERWISE SPECIFIED

L	± 0.125"	∠	± 1°
W	± 0.125"	⌖	± 0.0625"
H	± 0.125"	⌀	± 0.03125"

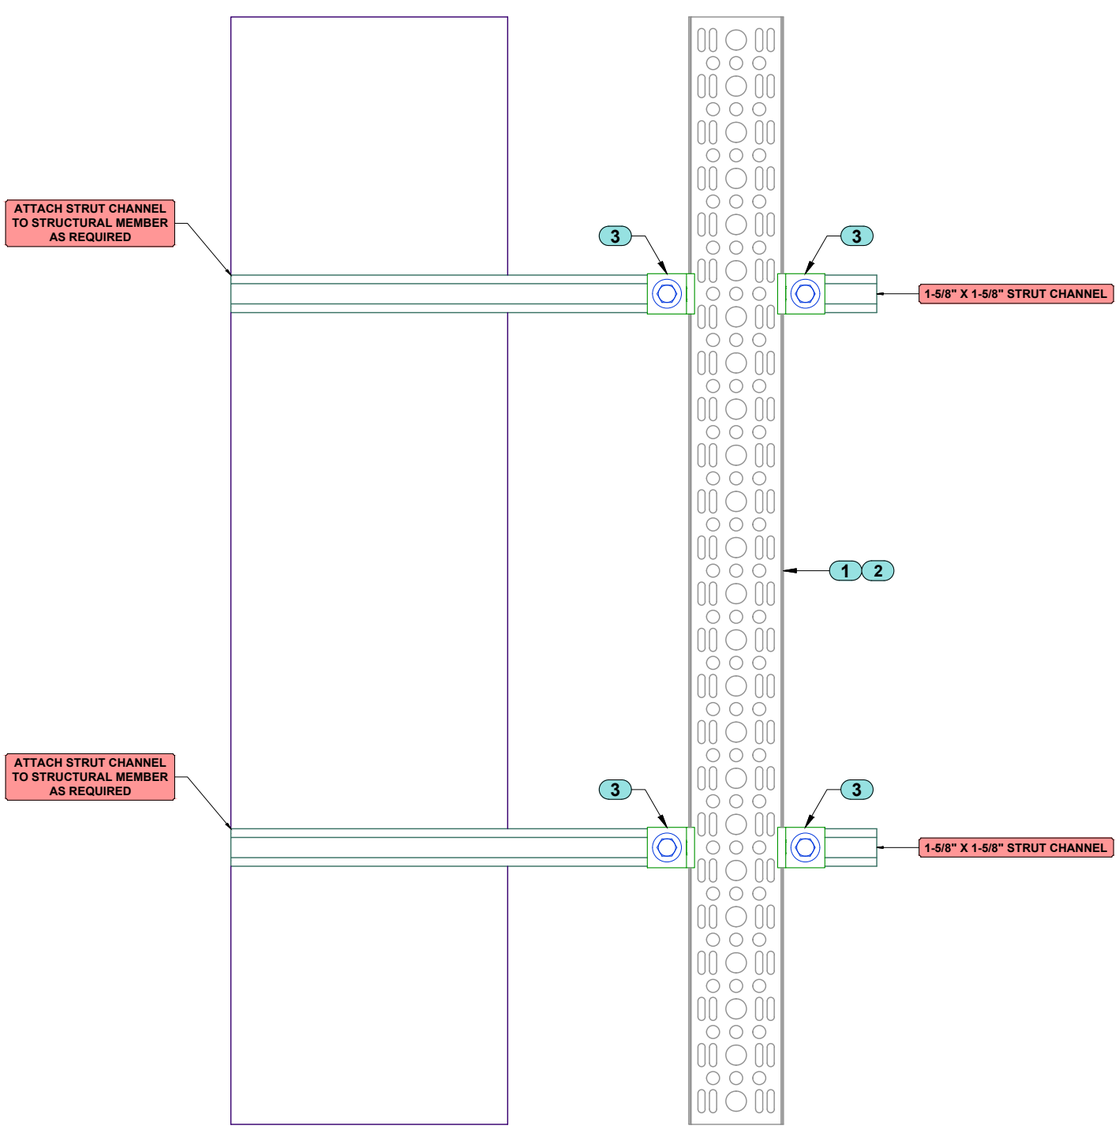

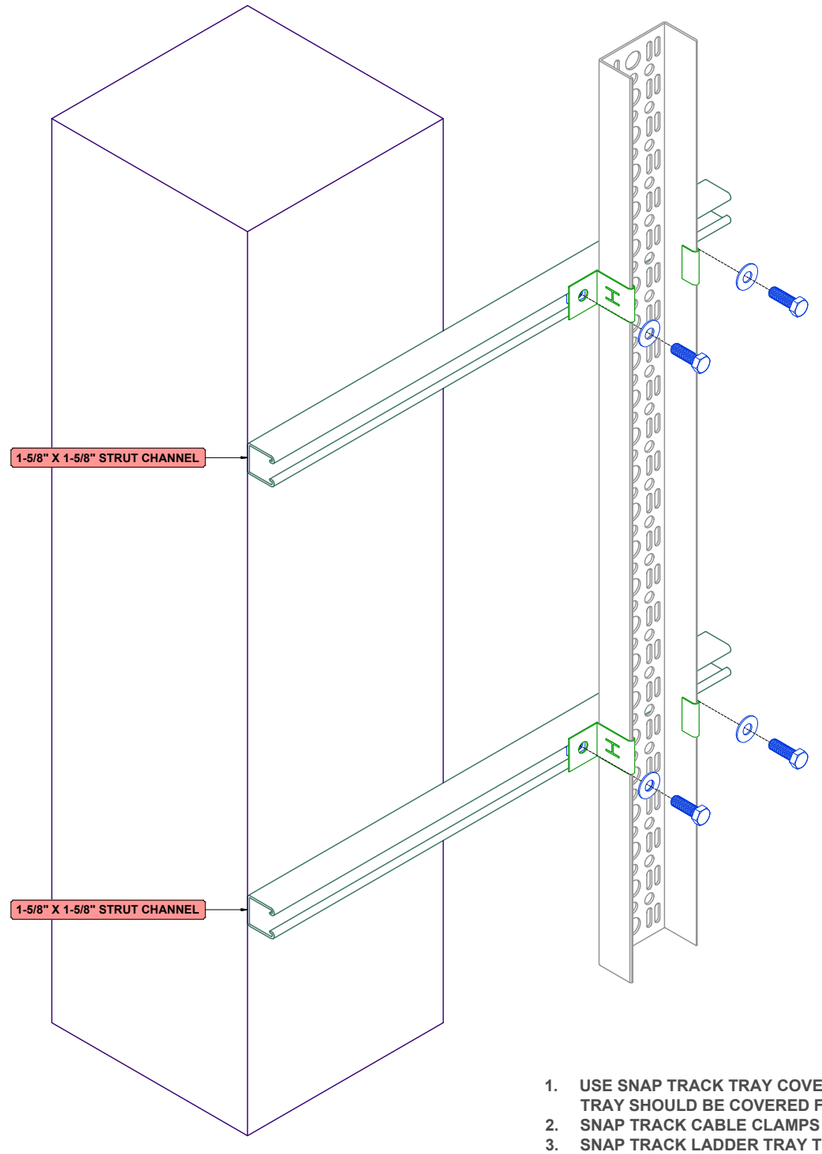

1. USE SNAP TRACK TRAY COVER ONLY IF LESS THAN 3' ABOVE WORKING SURFACE. TRAY SHOULD BE COVERED FOR 3' MINIMUM.
2. SNAP TRACK CABLE CLAMPS TO BE USED TO SECURE CABLES.
3. SNAP TRACK LADDER TRAY TRANSITION TO BE INSTALLED TO SIDE OF THE LADDER TRAY BY USING BOLTS AND NUTS. SNAP TRACK CHANNEL TO BE ATTACHED USING SNAP TRACK PINS.

BILL OF MATERIALS

ITEM	QTY	DESCRIPTION
1	AS REQ'D	STC-4-2-AL-V2 - SNAP TRACK CABLE TRAY- 4" X 2" X 20'L - ALUMINUM
2	AS REQ'D	STCV-4-AL - SNAP TRACK COVER - 4" X 10'L - ALUMINUM
3	AS REQ'D	STHC-2-AL - SNAP TRACK HOLD DOWN CLAMP - ALUMINUM

The information, data, and drawings embodied in this document are strictly confidential and are supplied with the understanding that they will not be disclosed to third parties without the prior written consent of Techline Manufacturing. All information, illustrations, images, and data contained herein Copyright ©2025 TechLine Manufacturing.

DRAWN BY: LSTJOHN	
DATE: 1 APR 2026	
PART#: TYPICAL VERTICAL CHANNEL SUPPORT INSTALLATION	
DWG #: TYPICAL VERTICAL CHANNEL SUPPORT INSTALLATION.DWG	

PRODUCTION DRAWING
RELEASED FOR PRODUCTION

DIMENSIONS AND TOLERANCES ARE FOR MANUFACTURING PURPOSES ONLY. SUPPLIED COMPONENTS AND POST PRODUCTION TOLERANCES MAY VARY FROM THE MANUFACTURING AND PRODUCTION TOLERANCES DEFINED WITHIN THIS DOCUMENT.


TOLERANCES - ALL DIMENSIONS ARE IN INCHES
DIMENSIONS ARE IN ACCORDANCE WITH ASME Y14.5-2009
MANUFACTURING TOLERANCES UNLESS OTHERWISE SPECIFIED

L	± 0.125"	∠	± 1°
W	± 0.125"	⌖	± 0.0625"
H	± 0.125"	∅	± 0.03125"

JOB#	---------
QTY	----
REQUIRED DATE	----

CUT LENGTHS PER ASSEMBLY

MATERIAL	QTY	LENGTH	TOTAL LENGTH
XX - AL	1	1"	1"

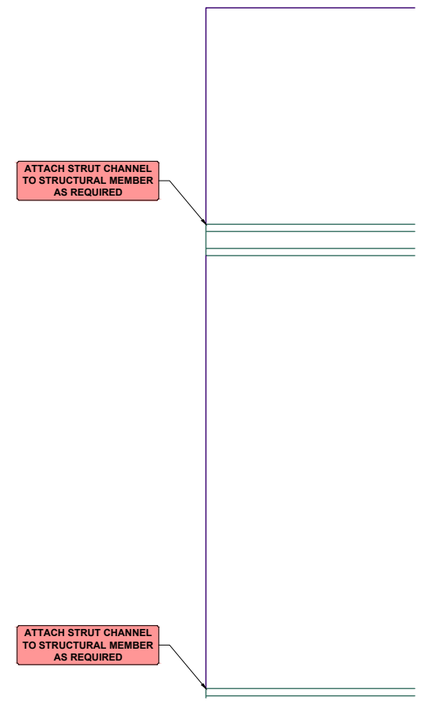

BILL OF MATERIALS

ITEM	QTY	DESCRIPTION
1	1"	XX - ALUMINUM
2	1	XX - ALUMINUM

NOMINAL PIPE SIZE:	2"
PIPE SCHEDULE:	40S
PIPE DIAMETER:	2.375"
PIPE THICKNESS:	0.154"
INSIDE PIPE DIAMETER:	2.067"
OVERALL HEIGHT :	54"
POST PRODUCTION PROCESS:	----

1. ALL CARBON STEEL COMPONENTS TO BE HOT-DIPPED GALVANIZED AFTER FABRICATION.

The information, data, and drawings embodied in this document are strictly confidential and are supplied with the understanding that they will not be disclosed to third parties without the prior written consent of Techline Manufacturing. All information, illustrations, images, and data contained herein Copyright ©2025 TechLine Manufacturing.