




1. USE SNAP TRACK TRAY COVER ONLY IF LESS THAN 3' ABOVE WORKING SURFACE. TRAY SHOULD BE COVERED FOR 3' MINIMUM.
2. SNAP TRACK CABLE CLAMPS TO BE USED TO SECURE CABLES.
3. SNAP TRACK HOLD DOWN CLAMPS (STHC-2-AL) TO BE ATTACHED TO STRUT USING 1/2" SS BOLT, FLAT WASHER AND SPRING/STRUT NUT. ALSO CAN BE BOLTED THROUGH WITH A HEX NUT.

BILL OF MATERIALS

ITEM	QTY	DESCRIPTION	ITEM	QTY	DESCRIPTION
1	AS REQ'D	STC-2-2-AL-V2 - SNAP TRACK CABLE TRAY- 2" X 2" X 20'L - ALUMINUM	11	4	6SS25LW - 1/4" LOCK WASHER - 316 STAINLESS STEEL
2	AS REQ'D	STCV-2-AL - SNAP TRACK COVER - 2" X 10'L - ALUMINUM	12	4	SS38HB1.5 - 3/8" X 1-1/2" HEX BOLT - STAINLESS STEEL
3	AS REQ'D	STWC-2-AL - SNAP TRACK 2" WIRE CLAMPS, RUBBER COATED W/ PUSHPIN	13	4	SN38SS - 3/8" STRUT CHANNEL SPRING NUT - STAINLESS STEEL
4	1	STBE-2-2-AL - SNAP TRACK BLIND END - 2" X 2"	14	4	6SS38LW - 3/8" LOCK WASHER - 316 STAINLESS STEEL
5	AS REQ'D	STHC-2-AL - SNAP TRACK HOLD DOWN CLAMP - ALUMINUM	15	AS REQ'D	STATR-500-XX - 1/2" ALL THREAD ROD - 316 STAINLESS STEEL
6	AS REQ'D	1000 - SLOTTED SINGLE STRUT - 1 -5/8" X 1-5/8" X 10'L - MATERIAL AS SPECIFIED	16	8	SW50SS - 1/2" SQUARE WASHER - 316 STAINLESS STEEL
7	1	10" X 10" X 1/4" PLATE - MATERIAL AS SPECIFIED	17	8	6SS50HN - 1/2" HEX NUT - 316 STAINLESS STEEL
8	4	SS25CS1.5 - 1/4" X 1-1/2" SLOTTED CAP SCREW - 316 STAINLESS STEEL	18	8	6SS50LW - 1/2" LOCK WASHER - 316 STAINLESS STEEL
9	4	6SS25HN - 1/4" HEX NUT - 316 STAINLESS STEEL	19	1	EMERGENCY STOP RED PUSH BUTTON - AS SPECIFIED
10	4	6SS25FW - 1/4" FLAT WASHER - 316 STAINLESS STEEL			

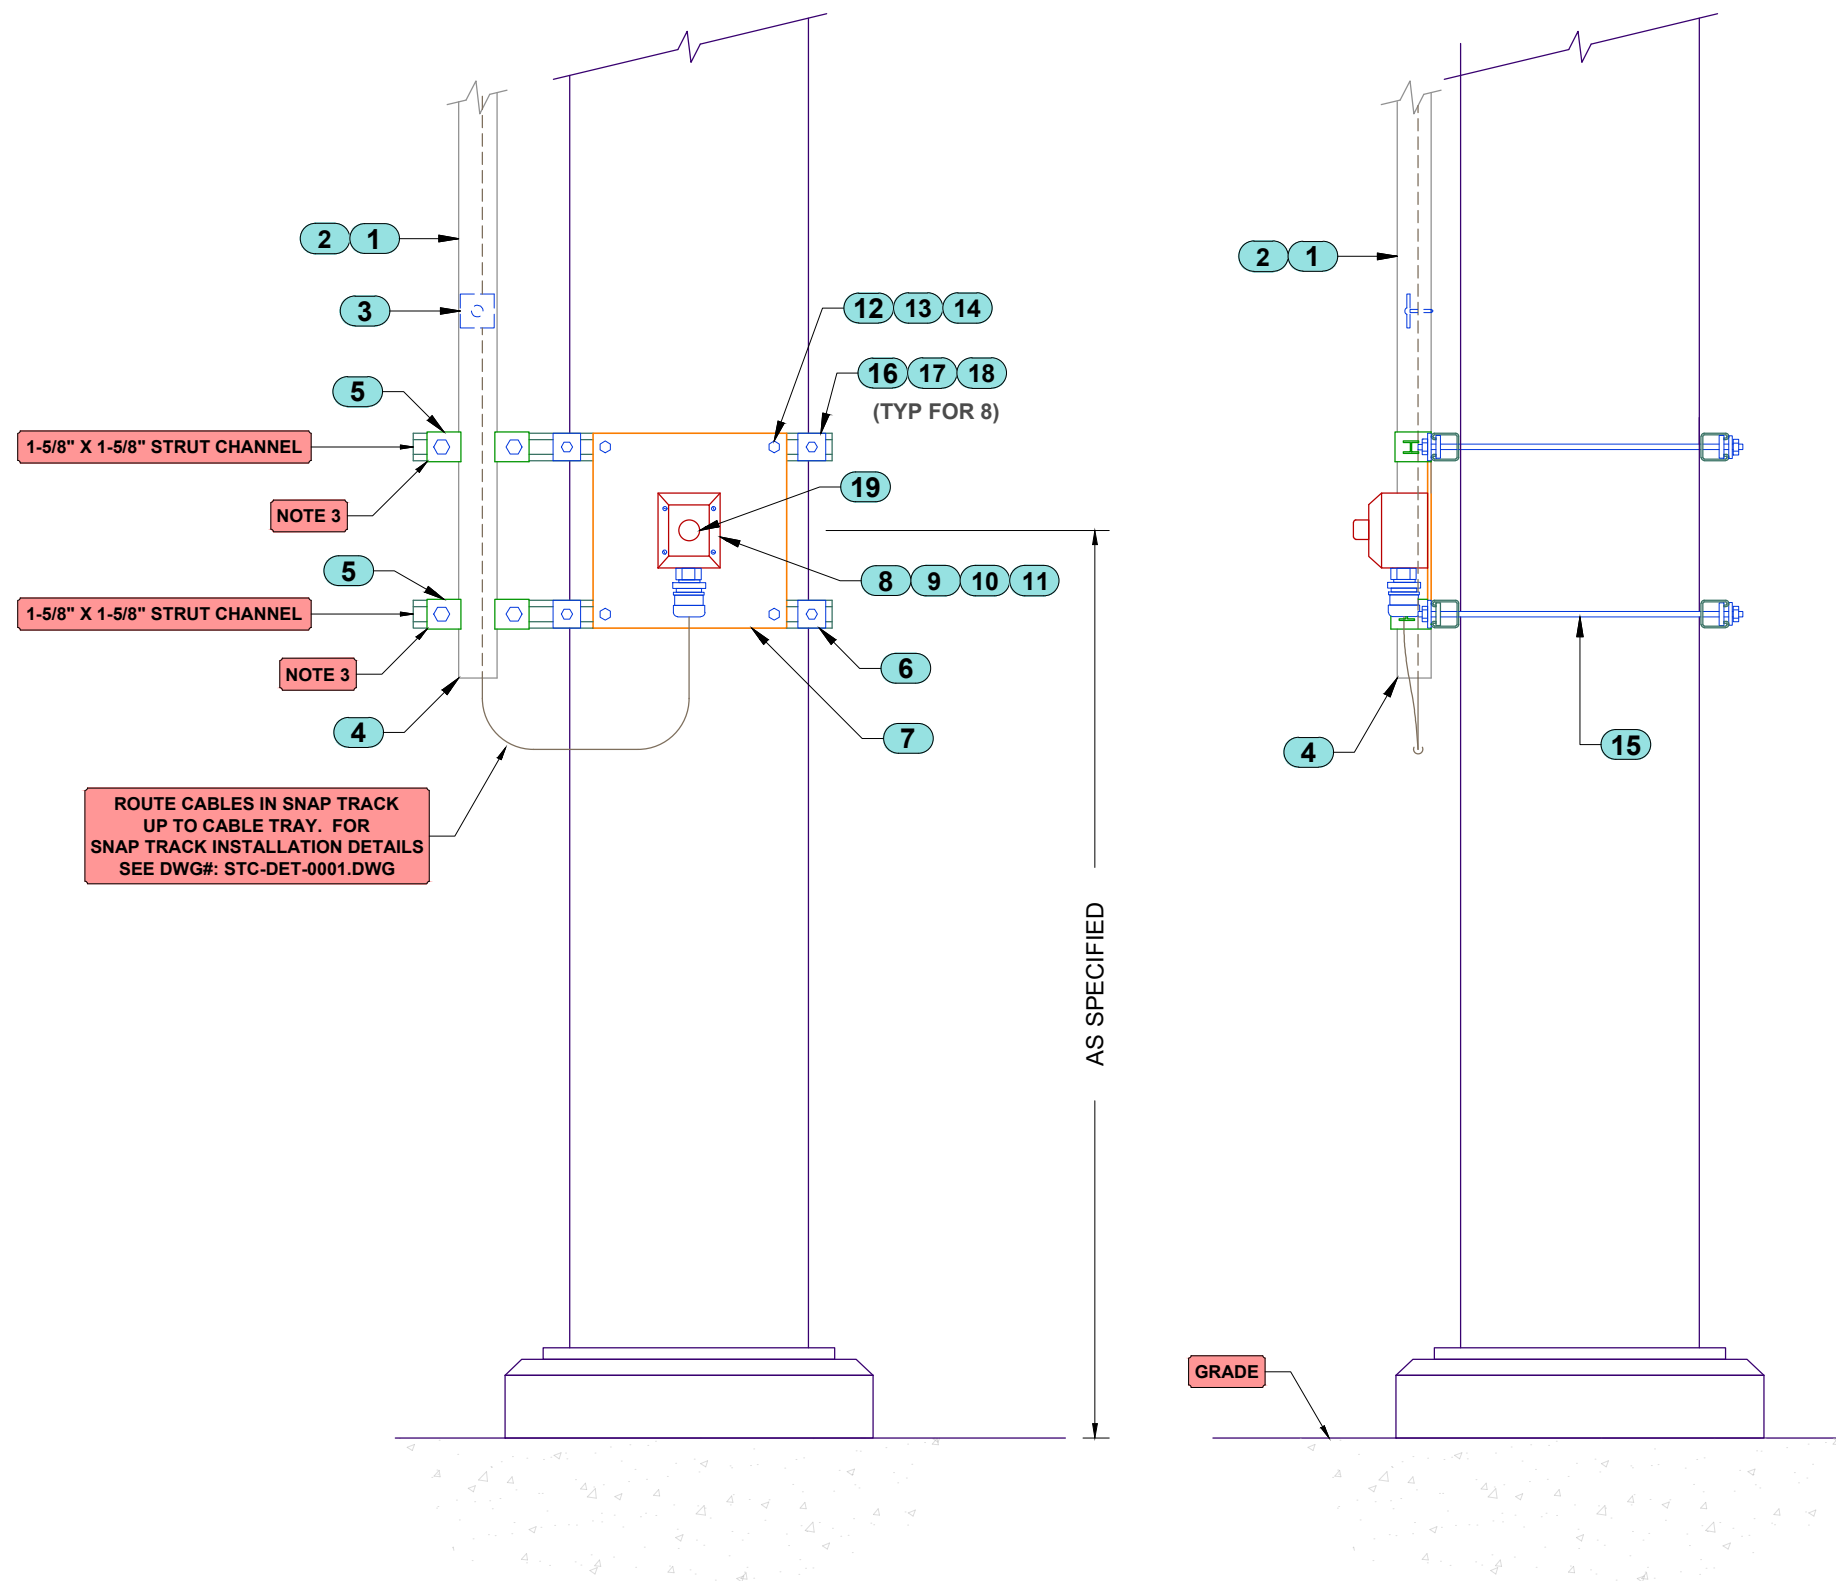

The information, data, and drawings embodied in this document are strictly confidential and are supplied with the understanding that they will not be disclosed to third parties without the prior written consent of Techline Manufacturing. All information, illustrations, images, and data contained herein Copyright ©2025 TechLine Manufacturing.