




1. ATTACH BEAM CLAMP TO STRUCTURE
2. ATTACH 3/8" DIAMETER ALL THREAD ROD TO THE BEAM CLAMP. TWO PIECES REQUIRED PER SINGLE HANGER BRACKET.
3. ATTACH ALL THREAD ROD TO STRUT HANGER BRACKET WITH 3/8" NUT AND WASHER.
4. ADJUST SNAP TRACK STRUT HANGER BRACKET TO THE WIDTH OF THE CHANNEL USING THE PROVIDED BOLT AND NUT.
5. STRUT HANGER BRACKET ATTACHES TO THE SNAP TRACK CHANNEL WITH A 1/4" X 1" CARRIAGE BOLT, 1/4" FLAT WASHER, 1/4" X 1" FENDER WASHER AND A 1/4" NYLON INSERT LOCKNUT.

BILL OF MATERIALS

ITEM	QTY	DESCRIPTION	ITEM	QTY	DESCRIPTION
1	AS REQ'D	STC-4-2-AL-V2 - SNAP TRACK CABLE TRAY- 4" X 2" X 20'L - ALUMINUM	11	AS REQ'D	SS25FW1.00 - 1/4" X 1" FENDER WASHER - 316 STAINLESS STEEL
2	AS REQ'D	STCV-4-AL - SNAP TRACK COVER - 4" X 10'L - ALUMINUM			
3	AS REQ'D	RC375 EP - 3/8" BEAM CLAMP - ELECTROPLATED			
4	AS REQ'D	STATR-375-XX - 3/8" ALL THREAD ROD - CUT TO LENGTH - STAINLESS STEEL			
5	AS REQ'D	STHB-4-6-AL-XX - SNAP TRACK SINGLE HANGER BRACKET - NO ALL THREAD - ALUMINUM			
6	AS REQ'D	6SS38FW - 3/8" FLAT WASHER - 316 STAINLESS STEEL			
7	AS REQ'D	6SS38HN - 3/8" HEX NUT - 316 STAINLESS STEEL			
8	AS REQ'D	SS25CB1.00 - 1/4" X 1" CARRIAGE BOLT - 316 STAINLESS STEEL			
9	AS REQ'D	6SS25FW - 1/4" FLAT WASHER - 316 STAINLESS STEEL			
10	AS REQ'D	1/4" NYLON INSERT LOCK NUT - STAINLESS STEEL			

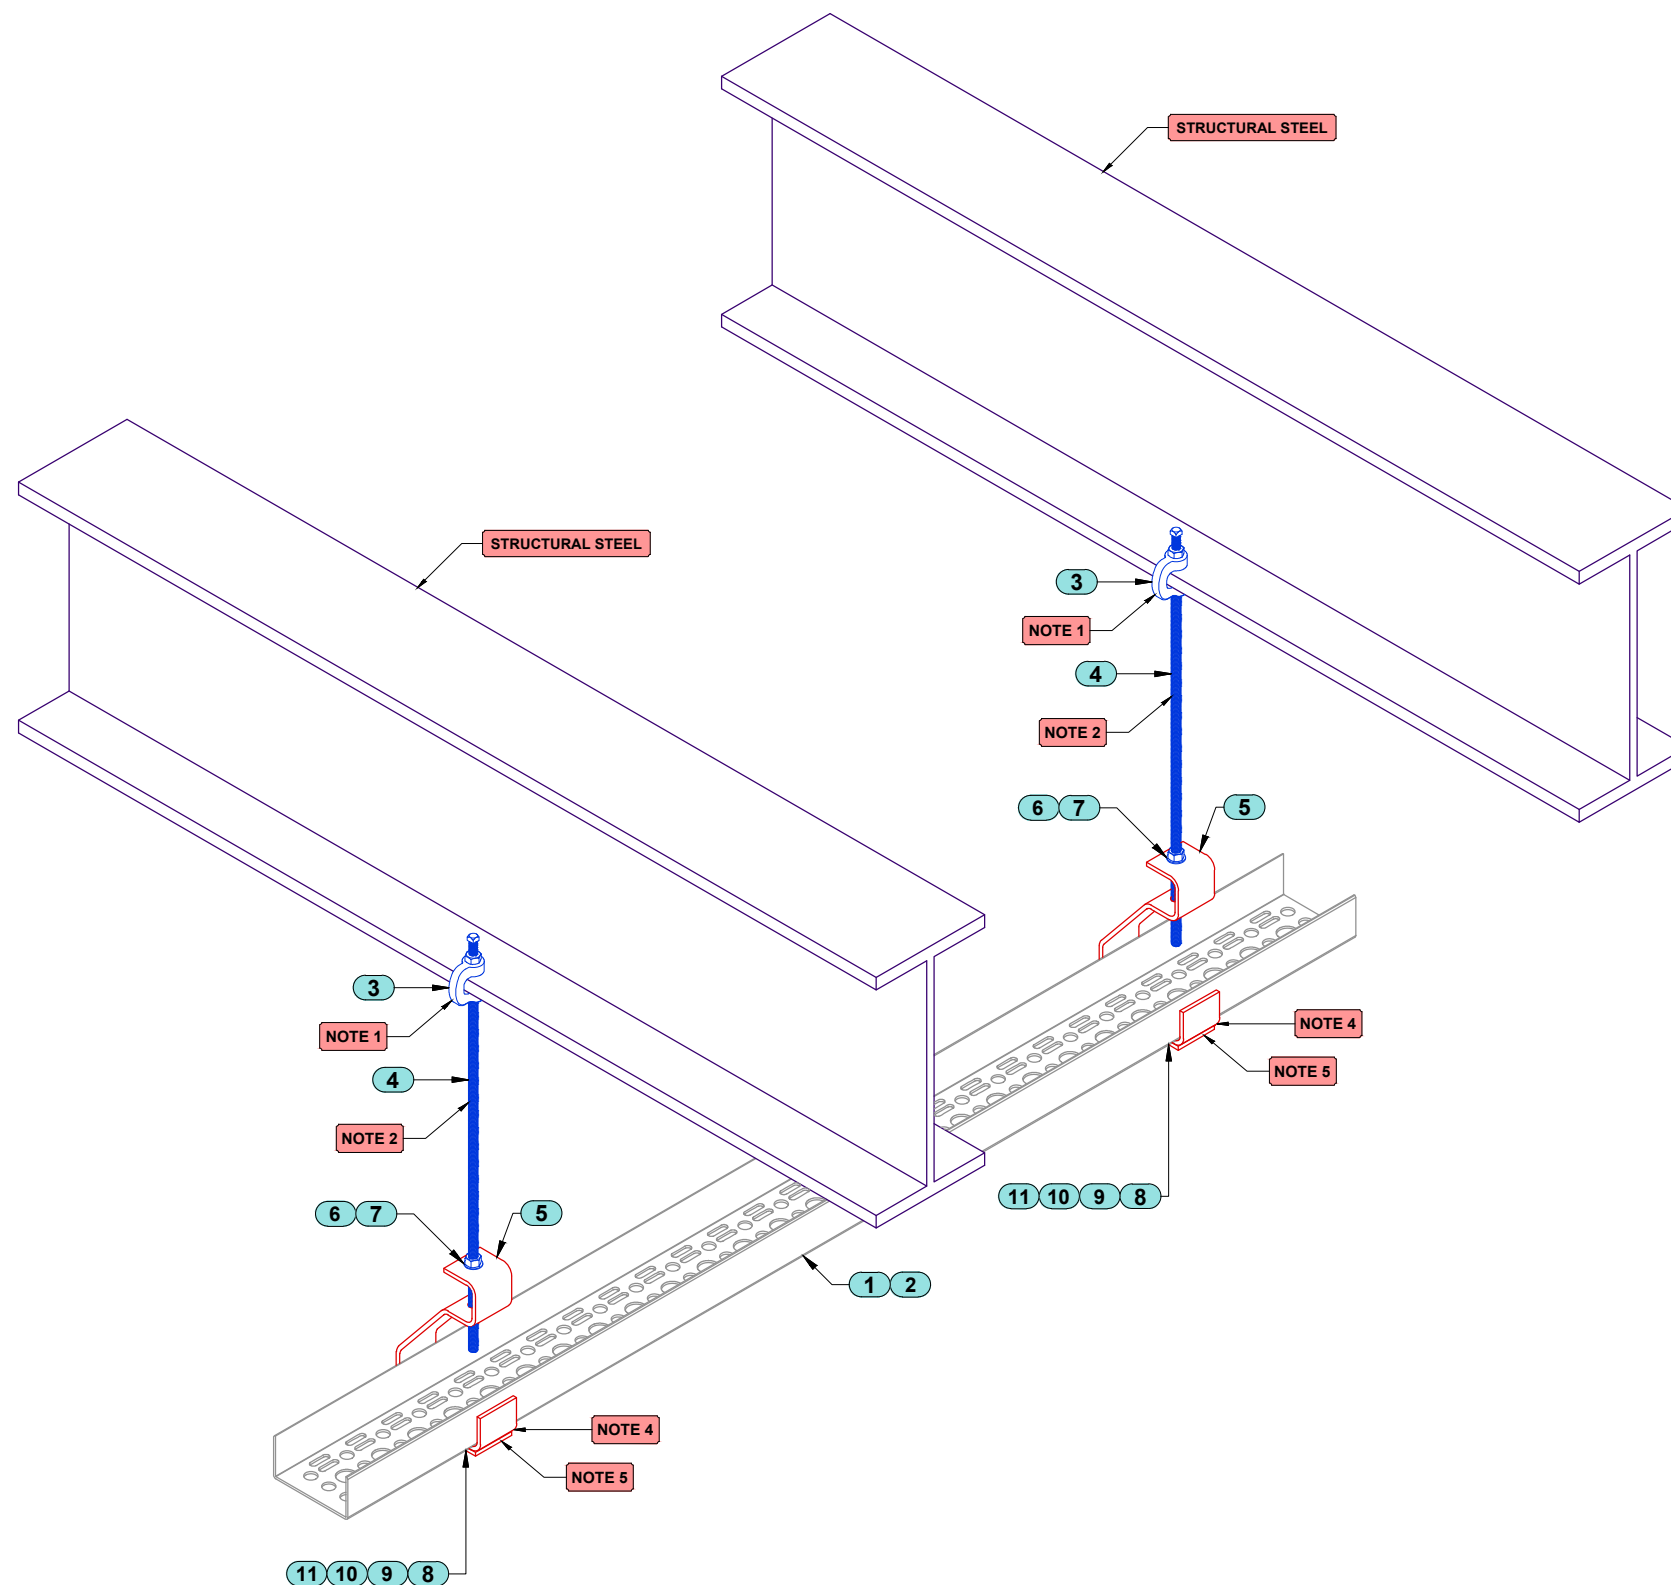

The information, data, and drawings embodied in this document are strictly confidential and are supplied with the understanding that they will not be disclosed to third parties without the prior written consent of Techline Manufacturing. All information, illustrations, images, and data contained herein Copyright ©2025 TechLine Manufacturing.