




1. OPTION #2 USES THE SNAP TRACK ADJUSTABLE HORIZONTAL SPLICE FOR A CHANGE IN PLANE OF THE CABLE TRAY. THE FITTING IS BROKEN APART AND THE CENTER SECTION REMOVED. EACH END IS THEN ATTACHED TO A DESIRED LENGTH OF CHANNEL. THIS ALLOWS FOR LONGER OFFSET RUNS.
2. SNAP TRACK HOLD DOWN CLAMPS (STHC-2-AL) TO BE ATTACHED TO STRUT USING 1/2" SS BOLT, SS FLAT WASHERS AND SS SPRING/STRUT NUT. ALSO CAN BE THROUGH BOLTED WITH A HEX NUT. AS REQ'D.
3. BONDING JUMPER ATTACHED WITH 1/4" SS CARRIAGE BOLTS, SS FLAT WASHERS AND SS NYLON INSERT LOCK
4. REFER TO STC-DET-0011-B.DWG FOR TYPICAL HARDWARE AND BONDING JUMPER INSTALLATION.

BILL OF MATERIALS		
ITEM	QTY	DESCRIPTION
1	AS REQ'D	STC-4-2-AL-V2 - SNAP TRACK CABLE TRAY- 4" X 2" X 20'L - ALUMINUM
2	AS REQ'D	STCV-4-AL - SNAP TRACK COVER - 4" X 10'L - ALUMINUM
3	AS REQ'D	STAHS-4-2-AL - SNAP TRACK ADJUSTABLE HORIZONTAL SPLICE - 4" X 2" - ALUMINUM

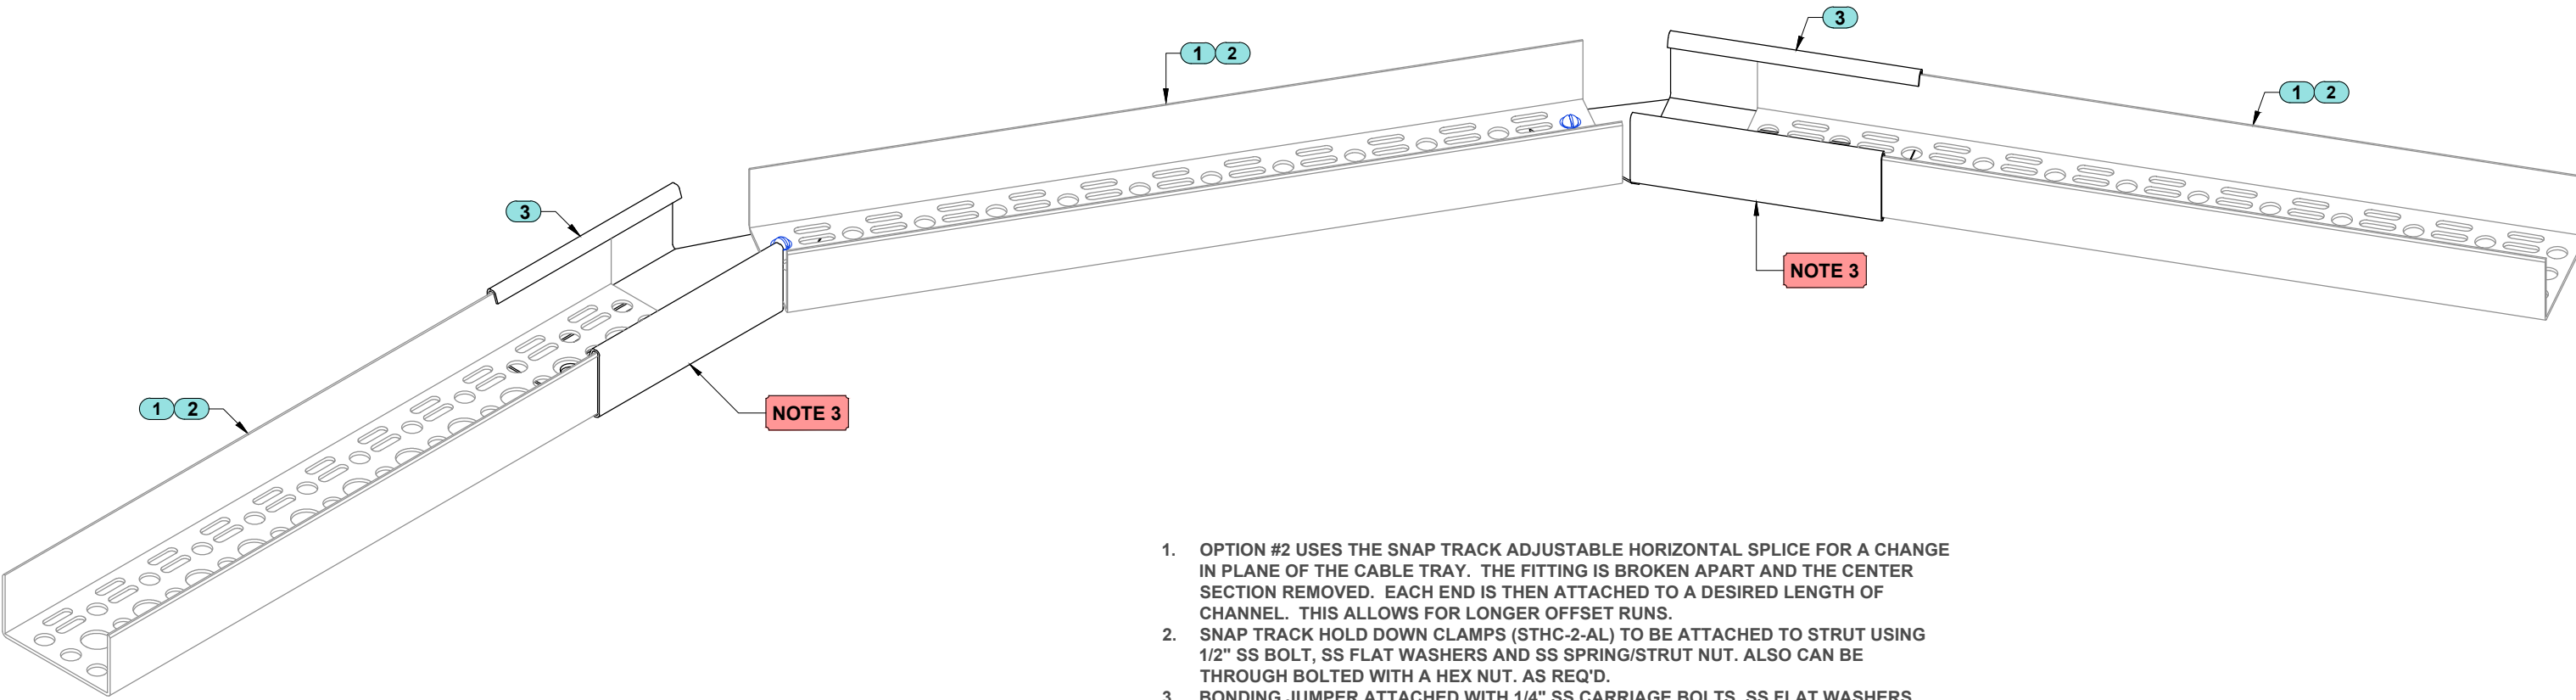